




LAPTOP PENAL CONNECT WIRE

UL AWM Style# 10064

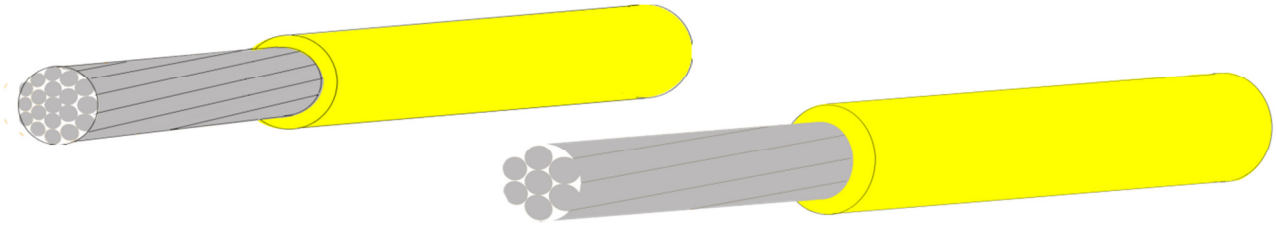

Construction:

AWG	Stranding	Conductor Dia. mm	Insulation Thickness mm	Outer Diameter Mm
27	7/35	0.42	0.10	0.62
28	19/40	0.40	0.10	0.60
30	7/38	0.31	0.125	0.56
32	7/40	0.24	0.070	0.38
32	19/44	0.25	0.070	0.39
34	7/42	0.20	0.060	0.32
34	19/46	0.20	0.065	0.33
36	7/44	0.15	0.060	0.27
38	7/46	0.12	0.070	0.26
40	7/48	0.09	0.070	0.23

Specification:

- Conductor: Solid/Stranded Tinned Copper or Tinned Copper Alloy
- Insulation: PFA/FEP/ETFE
- Flammability: VW-1
- Dielectric Strength: A.C. 2KV/min
- Color: Blue, Orange, Green, Brown, Gray, Black, White, Red, Yellow

Application:


- Panel wire for Laptop, LCD monitor.
- Wire harness of Camera, digital video & mobile phone
- Internal wiring of electronic computers and equipment
- Cable assemblies of PDA and Navigator

PLEASE NOTE: For the reason of product improvement, Hold Key may make improvements or changes in the products, the programs or services described at any time without notice. Moreover, the information contained herein may include typo or technical errors. Changes will be periodically made to address any such issues.

All specifications, drawings, designs, plans and particulars of size, weight and dimensions contained in the data sheet or commercial documentation of Hold Key is indicative only and shall not be binding on Hold Key or be treated as constituting a representation on the part of Hold Key.



Heat Resistant Wire UL AWM Style #1332

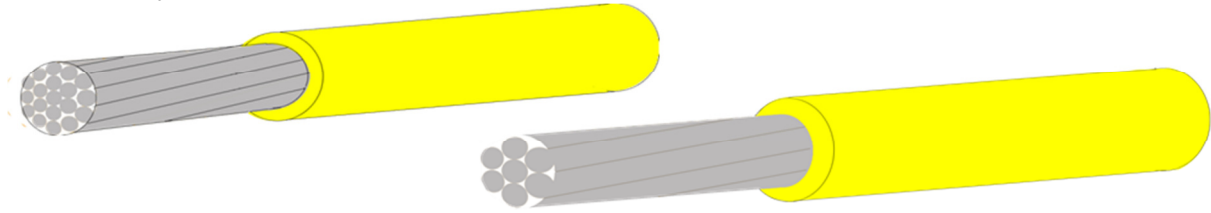

Construction:

UL1332				
AWG	Stranding	Conductor Dia. mm	Insulation Thickness mm	Outer Diameter Mm
30	1/0.254	0.25	0.33	0.91
30	7/0.102	0.30	0.33	0.96
30	19/0.064	0.98	0.33	1.64
28	1/0.32	0.32	0.33	0.98
28	7/0.127	0.38	0.33	1.04
26	1/0.404	0.40	0.33	1.06
26	7/0.16	0.48	0.33	1.14
24	1/0.511	0.51	0.33	1.17
24	7/0.203	0.61	0.33	1.27
22	1/0.643	0.64	0.33	1.3
22	7/0.254	0.76	0.33	1.42
20	1/0.813	0.81	0.33	1.47
20	7/0.32	0.96	0.33	1.62
18	7/0.404	1.2	0.33	1.86
18	19/0.254	1.27	0.33	1.93
16	19/0.287	1.5	0.33	2.16

Specification:

- Conductor: Solid/Stranded Tinned Copper
- Insulation: FEP
- Rating Voltage: 300V
- Rating Temperature: 200°C
- Color: Blue, Orange, Green, Brown, Gray, Black, White, Red, Yellow


PLEASE NOTE: For the reason of product improvement, Hold Key may make improvements or changes in the products, the programs or services described at any time without notice. Moreover, the information contained herein may include typo or technical errors. Changes will be periodically made to address any such issues.

All specifications, drawings, designs, plans and particulars of size, weight and dimensions contained in the data sheet or commercial documentation of Hold Key is indicative only and shall not be binding on Hold Key or be treated as constituting a representation on the part of Hold Key.



Heat Resistant Wire

UL AWM Style #1516, #10109

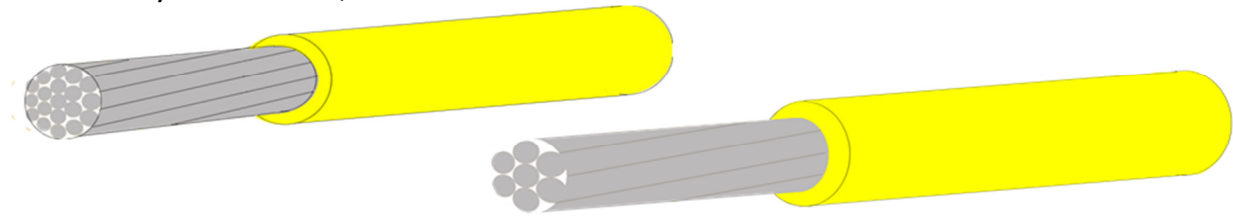

Construction:

UL1516, UL10109				
AWM	Stranding	Conductor Dia. mm	Insulation Thickness mm	Outer Diameter Mm
34	1/0.16	0.16	0.15	0.46
32	1/0.20	0.20	0.15	0.50
32	7/0.079	0.24	0.15	0.54
32	19/0.05	0.255	0.15	0.55
30	1/0.254	0.254	0.15	0.554
30	7/0.102	0.306	0.15	0.61
30	19/0.064	0.32	0.15	0.62
28	1/0.32	0.32	0.15	0.62
28	7/0.127	0.381	0.15	0.68
28	19/0.079	0.395	0.15	0.70
26	1/0.404	0.40	0.15	0.70
26	7/0.16	0.48	0.15	0.78
26	19/0.102	0.51	0.15	0.81
24	1/0.511	0.51	0.15	0.81
24	7/0.203	0.61	0.15	0.91
24	19/0.127	0.635	0.15	0.94
22	1/0.643	0.64	0.15	0.94
22	7/0.254	0.762	0.15	1.06
22	19/0.16	0.8	0.15	1.1
20	1/0.813	0.81	0.15	1.11
20	7/0.32	0.96	0.15	1.26
20	19/0.20	1.02	0.15	1.32
18	1/1.02	1.02	0.15	1.32
18	7/0.404	1.21	0.15	1.32

Specification:

- Conductor: Solid/Stranded Tinned Copper
- Insulation: ETFE
- Rating Voltage: 300V
- Rating Temperature: 200°C
- Color: Blue, Orange, Green, Brown, Gray, Black, White, Red, Yellow


PLEASE NOTE: For the reason of product improvement, Hold Key may make improvements or changes in the products, the programs or services described at any time without notice. Moreover, the information contained herein may include typo or technical errors. Changes will be periodically made to address any such issues.

All specifications, drawings, designs, plans and particulars of size, weight and dimensions contained in the data sheet or commercial documentation of Hold Key is indicative only and shall not be binding on Hold Key or be treated as constituting a representation on the part of Hold Key.



Heat Resistant Wire

UL AWM Style #1709, #1710

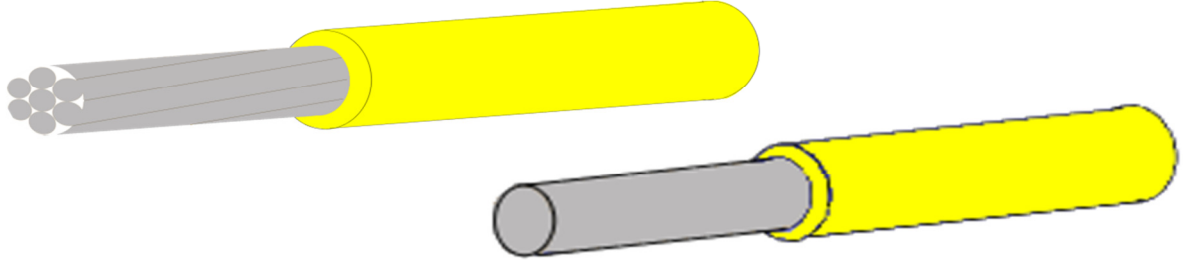

Construction:

AWM			UL1709		UL1710	
AWG	Stranding	Conductor Dia. mm	Insulation Thickness mm	Outer Diameter Mm	Insulation Thickness mm	Outer Diameter Mm
28	1/0.32	0.32	0.36	1.04	0.56	1.44
28	7/0.127	0.381	0.36	1.10	0.56	1.50
26	1/0.404	0.40	0.36	1.12	0.56	1.52
26	7/0.16	0.48	0.36	1.20	0.56	1.60
24	1/0.511	0.51	0.36	1.23	0.56	1.73
24	7/0.203	0.61	0.36	1.33	0.56	1.76
22	1/0.643	0.64	0.36	1.36	0.56	1.88
22	7/0.254	0.762	0.36	1.48	0.56	1.93
20	1/0.813	0.81	0.36	1.53	0.56	2.08
20	7/0.32	0.96	0.36	1.68	0.56	2.33

Specification:

- Conductor: Solid/Stranded Tinned Copper
- Insulation: PFA
- Rating Voltage: 300V/600V
- Rating Temperature: 260°C
- Color: Blue, Orange, Green, Brown, Gray, Black, White, Red, Yellow

PLEASE NOTE: For the reason of product improvement, Hold Key may make improvements or changes in the products, the programs or services described at any time without notice. Moreover, the information contained herein may include typo or technical errors. Changes will be periodically made to address any such issues.

All specifications, drawings, designs, plans and particulars of size, weight and dimensions contained in the data sheet or commercial documentation of Hold Key is indicative only and shall not be binding on Hold Key or be treated as constituting a representation on the part of Hold Key.